DEFLECTION.CA

MICKAEL HAUSMANN
514 371-6669 | mickael@deflection.ca
deflection.ca

CATEGORY: RUBBER HANGERS

EHD SERIES

Neoprene hanger, double deflection

33–370 lb Max. load (15–168 kg)	**0.4–0.5 in** Deflection (10–13 mm)	**8 models** Color-coded elements



DESCRIPTION

- Neoprene elements housed in heavy-duty steel brackets.
- Designed to prevent metal-to-metal contact.
- Double-deflection neoprene element.
- Accepts ⅜" (EHD1) or ½" (EHD2) hanger rods, supplied by others.


APPLICATION

Used for suspended HVAC equipment.

SELECTION TABLE

Model	Max. load (lb)	Max. load (kg)	Defl. (in)	A	B	C	D	Rod
EHD1 blue	33	15	0.4	3	1 ⅜	2	2 ¼	⅜
EHD1 red	44	20	0.4	3	1 ⅜	2	2 ¼	⅜
EHD1 green	66	30	0.4	3	1 ⅜	2	2 ¼	⅜
EHD1 black	110	50	0.4	3	1 ⅜	2	2 ¼	⅜
EHD2 blue	130	59	0.5	4 ½	1 ⅞	2 ¼	3	½
EHD2 red	160	73	0.5	4 ½	1 ⅞	2 ¼	3	½
EHD2 green	230	104	0.5	4 ½	1 ⅞	2 ¼	3	½
EHD2 black	370	168	0.5	4 ½	1 ⅞	2 ¼	3	½

Dimensions A to D and rod diameter in inches.

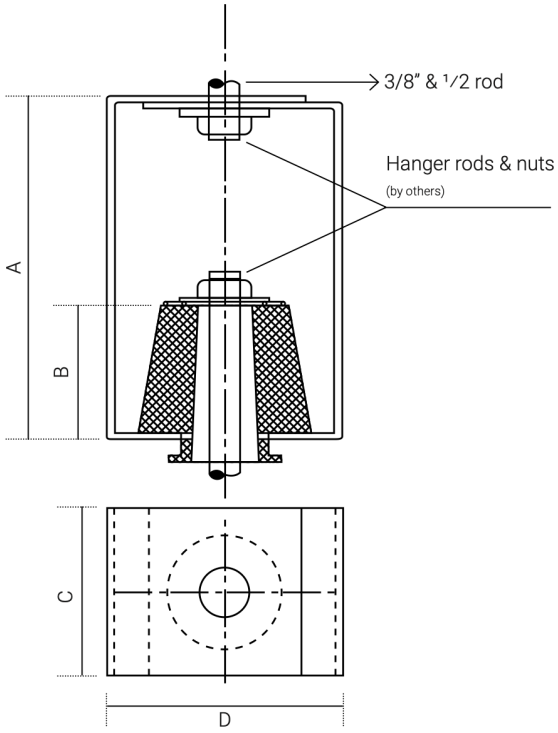

Hanger rods and nuts supplied by others.

Note: Research and development is an ongoing process. As improvements are made, specifications and dimensions may change without notice. Dimensional tolerances conform to international standards.