DEFLECTION.CA

MICKAEL HAUSMANN
514 371-6669 | mickael@deflection.ca
deflection.ca

CATEGORY: RUBBER FLOOR MOUNTS

RMD SERIES

EPDM rubber floor mount

33–2,200 lb Rated load (15–1,000 kg)	**0.32–0.47 in** Deflection (8–12 mm)	**16 models** 4 sizes, color-coded


DESCRIPTION

- Designed for floor mounting.
- Ribbed, non-skid base grips the surface; bolting down is recommended for best results.
- Steel-reinforced rubber for added strength.
- Threaded insert on top for fastening.
- Material: EPDM.
- RMD3 and RMD4 have a rectangular base.

APPLICATION

Used for a wide range of HVAC equipment such as compressors, air handling units, fans, pumps and chillers.



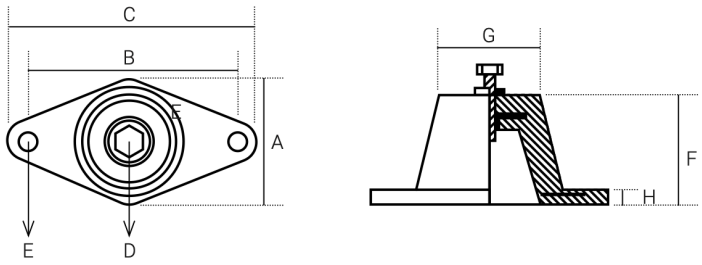

Dimensions A to H in millimetres (see table).

SELECTION TABLE

Model	Rated load (lb)	Rated load (kg)	Deflection (in)	Color	A	B	C	D	E	F	G	H
RMD1 33	33	15	0.32	blue	45	50	80	6	8.5	32	35	5
RMD1 44	44	20	0.32	red	45	50	80	6	8.5	32	35	5
RMD1 66	66	30	0.32	green	45	50	80	6	8.5	32	35	5
RMD1 110	110	50	0.32	black	45	50	80	6	8.5	32	35	5
RMD2 130	130	60	0.40	blue	60	76	98	10	8.5	45	45	5.5
RMD2 165	165	75	0.40	red	60	76	98	10	8.5	45	45	5.5
RMD2 220	220	100	0.40	green	60	76	98	10	8.5	45	45	5.5
RMD2 385	385	175	0.40	black	60	76	98	10	8.5	45	45	5.5
RMD3 200	200	90	0.47	blue	60	80	102	10	12	50	45	6.5
RMD3 275	275	125	0.47	red	60	80	102	10	12	50	45	6.5
RMD3 385	385	175	0.47	green	60	80	102	10	12	50	45	6.5
RMD3 500	500	225	0.47	black	60	80	102	10	12	50	45	6.5
RMD4 770	770	350	0.47	blue	92	120	150	12	14	90	70	10
RMD4 990	990	450	0.47	red	92	120	150	12	14	90	70	10
RMD4 1320	1,320	600	0.47	green	92	120	150	12	14	90	70	10
RMD4 2200	2,200	1,000	0.47	black	92	120	150	12	14	90	70	10

Note: Research and development is an ongoing process. As improvements are made, specifications and dimensions may change without notice. Dimensional tolerances conform to international standards.