DEFLECTION.CA

MICKAEL HAUSMANN
514 371-6669 | mickael@deflection.ca
deflection.ca

CATEGORY: ANTI-VIBRATION PADS

RP SERIES

Ribbed rubber pad

⅜ in	**15–55 psi**	**7 sizes**
Thickness (10 mm)	Working range (103–379 kPa)	Can be cut to size




DESCRIPTION

- Ribbed pattern on both faces.
- Easy to cut to size on site.
- Simple field installation.
- Working range from 15 to 55 psi.

APPLICATION

- Where bolting is to be avoided.
- Minor, non-critical vibration conditions.
- HVAC equipment, motors, pumps, generators, air-conditioning units, chillers, machine shop equipment, etc.
- Acoustic problem applications.

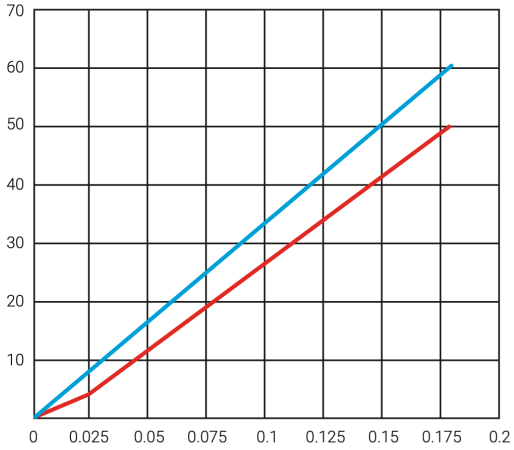

Load (psi) versus deflection (in). Blue: RP-18. Red: DP-18.

SELECTION TABLE

Model	Size (in)	Load at 15 psi (lb)	Load at 55 psi (lb)	At 55 psi (kg)
RP2	2 x 2	60	220	100
RP3	3 x 3	135	495	225
RP4	4 x 4	240	880	399
RP6	6 x 6	540	1,980	898
RP8	8 x 8	960	3,520	1,597
RP12	12 x 12	2,160	7,920	3,592
RP18	18 x 18	4,860	17,820	8,083

Loads per pad, calculated from the 15–55 psi working range. Thickness ⅜" for all sizes.

Note: Research and development is an ongoing process. As improvements are made, specifications and dimensions may change without notice. Dimensional tolerances conform to international standards.