DEFLECTION.CA


MICKAEL HAUSMANN
514 371-6669 | mickael@deflection.ca
deflection.ca

CATEGORY: ANTI-VIBRATION PADS

RSR SERIES

Rubber-steel-rubber pad

60 psi Maximum load (414 kPa)	**0.21 in** Deflection at max. load (5.3 mm)	**⅞ in** Thickness (22 mm)

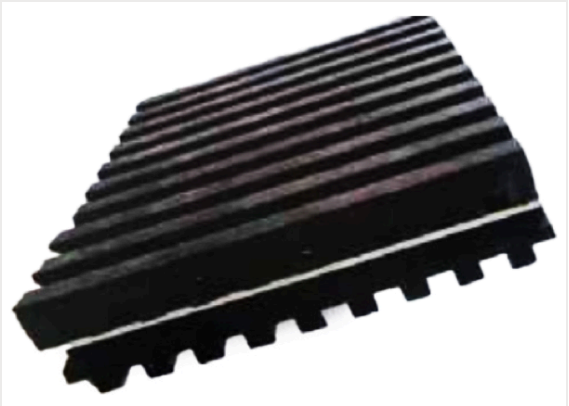

DESCRIPTION


- Multi-layer ribbed rubber pads separated by a steel plate for uniform load distribution.
- Recommended where vibration and noise control are required.
- No bolting required. Simple field installation.

APPLICATION

Used for pumps, motors, air-conditioning units, generators, fans, chillers and cooling towers.

SELECTION TABLE

Size (in)	Rated load per pad (lb)	(kg)
2 x 2	200	91
2 x 4	400	181
3 x 3	450	204
4 x 4	800	363
6 x 6	1,800	816

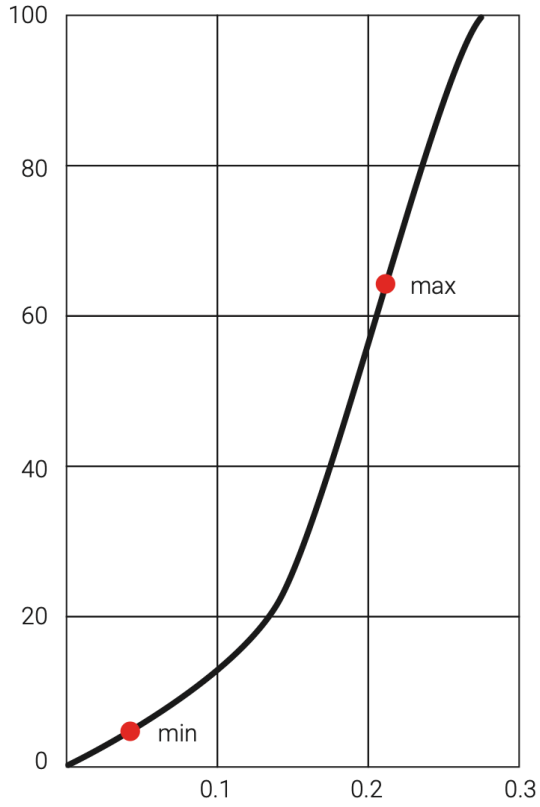

Load (psi) versus deflection (in). Maximum load: 60 psi at 0.21 in.

Note: Research and development is an ongoing process. As improvements are made, specifications and dimensions may change without notice. Dimensional tolerances conform to international standards.

DEFLECTION · Acoustics & vibration isolation
2480 boul. des Entreprises, Terrebonne, QC J6X 4J8
514 371-6669 · info@deflection.ca · deflection.ca