DEFLECTION.CA

MICKAEL HAUSMANN
514 371-6669 | mickael@deflection.ca
deflection.ca

CATEGORY: SPRING HANGERS

SHE1 SERIES

Spring hanger isolator with rubber element

40–465 lb Rated load (18–210 kg)	**1 in** Static deflection (25 mm)	**½ in max.** Hanger rod diameter



DESCRIPTION


- Heavy-duty steel housing.
- Springs made from high-quality spring steel.
- Springs powder-coated and color-coded for easy identification.
- Special rubber washers ensure uniform load distribution.
- Accepts hanger rods up to ½" diameter (rods and nuts supplied by others).

APPLICATION

Used for a wide range of suspended HVAC equipment such as fan coil units, air handling units, fans, pumps and chillers.

SELECTION TABLE

Model	Rated load (lb)	Rated load (kg)	Deflection (in)	Spring color
SHE1 40	40	18	1.00	pink
SHE1 65	65	30	1.00	orange
SHE1 75	75	34	1.00	black
SHE1 110	110	50	1.00	blue
SHE1 150	150	68	1.00	brown
SHE1 175	175	80	1.00	green
SHE1 215	215	98	1.00	white
SHE1 245	245	111	1.00	purple
SHE1 300	300	136	1.00	yellow
SHE1 400	400	181	1.00	red
SHE1 465	465	210	1.00	dark brown

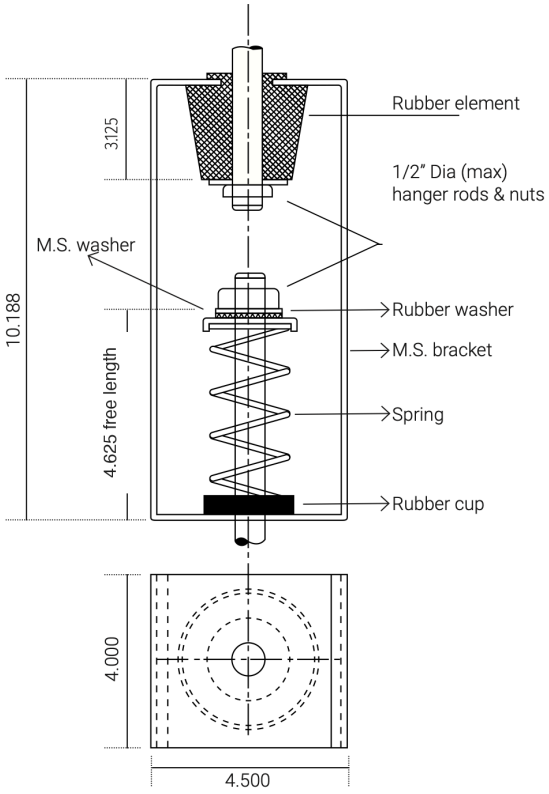

Dimensions in inches. M.S. = mild steel. Hanger rods and nuts not included.

Note: Research and development is an ongoing process. As improvements are made, specifications and dimensions may change without notice. Dimensional tolerances conform to international standards.