DEFLECTION.CA

MICKAEL HAUSMANN
514 371-6669 | mickael@deflection.ca
deflection.ca

CATEGORY: SPRING HANGERS

SHL1 SERIES

Spring hanger isolator

55–735 lb Rated load (25–334 kg)	**0.80–1.40 in** Static deflection (20–36 mm)	**¾ in max.** Hanger rod diameter



DESCRIPTION


- Heavy-duty steel housing.
- Springs made from high-quality spring steel.
- Springs powder-coated and color-coded for easy identification.
- Special rubber washers ensure uniform load distribution.
- Accepts hanger rods up to ¾" diameter (rods and nuts supplied by others).

APPLICATION

Used for a wide range of suspended HVAC equipment such as fan coil units, air handling units, fans, pumps and chillers.

SELECTION TABLE

Model	Rated load (lb)	Rated load (kg)	Deflection (in)	Spring color
SHL1 55	55	25	1.40	pink
SHL1 75	75	34	1.30	black
SHL1 122	122	55	1.30	blue
SHL1 150	150	68	1.30	brown
SHL1 215	215	98	1.20	white
SHL1 300	300	136	1.20	yellow
SHL1 400	400	181	1.20	red
SHL1 500	500	227	1.10	dark brown
SHL1 600	600	272	1.00	purple
SHL1 735	735	334	0.80	dark green

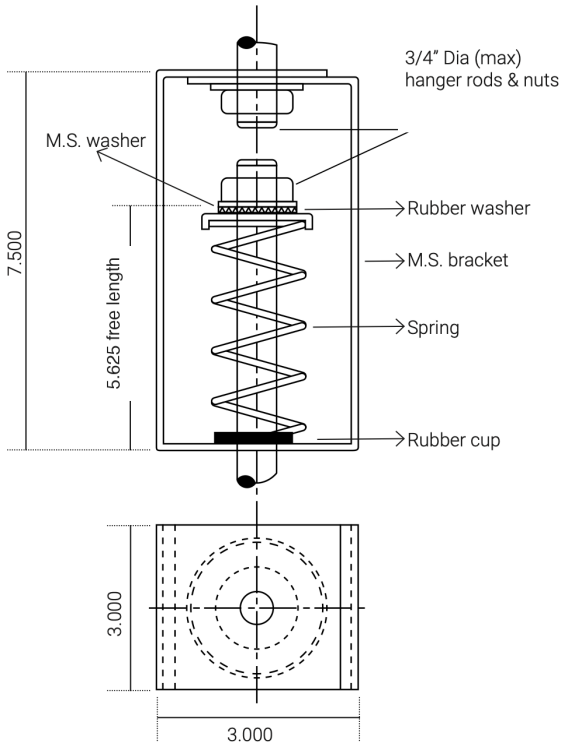

Dimensions in inches. M.S. = mild steel. Hanger rods and nuts not included.

Note: Research and development is an ongoing process. As improvements are made, specifications and dimensions may change without notice. Dimensional tolerances conform to international standards.