DEFLECTION.CA

MICKAEL HAUSMANN
514 371-6669 | mickael@deflection.ca
deflection.ca

CATEGORY: SPRING HANGERS

SHL2 SERIES

Spring hanger isolator, 2 in deflection

200–1,300 lb Rated load (91–590 kg)	**2.00–2.25 in** Static deflection (51–57 mm)	**¾ in max.** Hanger rod diameter



DESCRIPTION


- Heavy-duty steel housing.
- Springs made from high-quality spring steel.
- Springs powder-coated and color-coded for easy identification.
- Special rubber washers ensure uniform load distribution.
- Accepts hanger rods up to ¾" diameter (rods and nuts supplied by others).

APPLICATION

Used for a wide range of suspended HVAC equipment such as fan coil units, air handling units, fans, pumps and chillers.

SELECTION TABLE

Model	Rated load (lb)	Rated load (kg)	Deflection (in)	Spring color
SHL2 200	200	91	2.25	white
SHL2 375	375	170	2.00	red
SHL2 500	500	227	2.00	black
SHL2 700	700	318	2.00	green
SHL2 900	900	408	2.00	orange
SHL2 1100	1,100	499	2.00	brown
SHL2 1300	1,300	590	2.00	blue

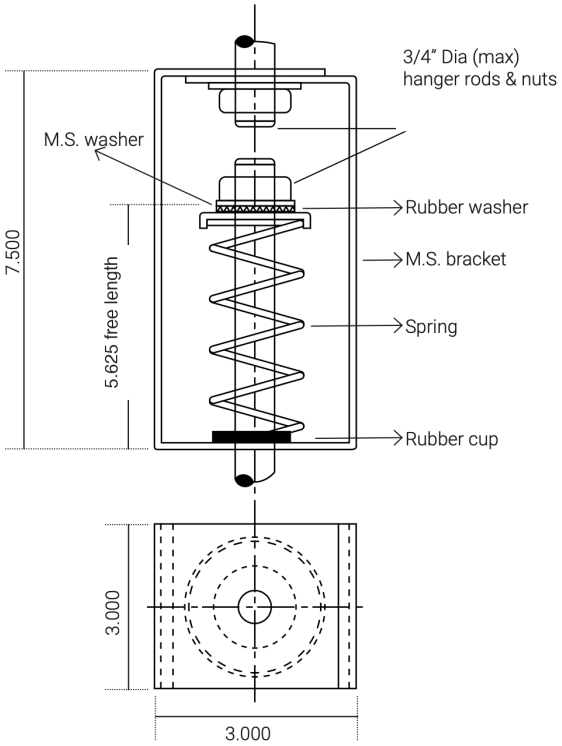

Dimensions in inches. M.S. = mild steel. Hanger rods and nuts not included.

Note: Research and development is an ongoing process. As improvements are made, specifications and dimensions may change without notice. Dimensional tolerances conform to international standards.