DEFLECTION.CA

MICKAEL HAUSMANN
514 371-6669 | mickael@deflection.ca
deflection.ca

CATEGORY: SPRING HANGERS

SH SERIES

Spring hanger isolator

20–175 lb Rated load (9–80 kg)	**0.75–1.00 in** Static deflection (19–25 mm)	**⅜ in max.** Hanger rod diameter



DESCRIPTION


- Heavy-duty steel housing.
- Springs made from high-quality spring steel.
- Springs powder-coated and color-coded for easy identification.
- Special rubber washers ensure uniform load distribution.
- Accepts hanger rods up to ⅜" diameter (rods and nuts supplied by others).

APPLICATION

Used for a wide range of suspended HVAC equipment such as fan coil units, air handling units, fans, pumps and chillers.

SELECTION TABLE

Model	Rated load (lb)	Rated load (kg)	Deflection (in)	Spring color
SH 20	20	9	0.75	pink
SH 45	45	20	0.75	black
SH 70	70	32	0.75	red
SH 110	110	50	0.75	blue
SH 175	175	80	1.00	brown

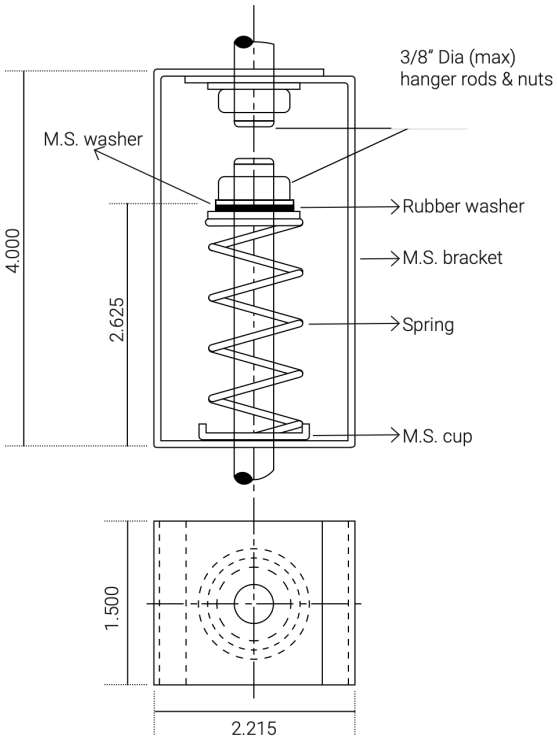

Dimensions in inches. M.S. = mild steel. Hanger rods and nuts not included.

Note: Research and development is an ongoing process. As improvements are made, specifications and dimensions may change without notice. Dimensional tolerances conform to international standards.