DEFLECTION.CA

MICKAEL HAUSMANN
514 371-6669 | mickael@deflection.ca
deflection.ca

CATEGORY: RUBBER-METAL ISOLATORS

VIB 1-5 SERIES

Rubber-metal vibration damper

100–1,500 kg	**2–6 mm**	**20 models**
Max. load (220–3,307 lb)	Deflection (0.08–0.24 in)	5 sizes, color-coded


LOAD TABLE

Model	Max. load (kg)	Max. load (lb)	Deflection (mm)	Color mark
VIB1-100	100	220	2	blue
VIB1-150	150	331	2	grey
VIB1-200	200	441	2	red
VIB1-300	300	661	2	green
VIB2-120	120	265	2	blue
VIB2-150	150	331	2	grey
VIB2-180	180	397	2	red
VIB2-280	280	617	2	green
VIB3-275	275	606	4	blue
VIB3-375	375	827	4	grey
VIB3-450	450	992	4	red
VIB3-650	650	1,433	4	green
VIB4-300	300	661	4	blue
VIB4-400	400	882	4	grey
VIB4-600	600	1,323	4	red
VIB4-750	750	1,653	4	green
VIB5-500	500	1,102	6	blue
VIB5-700	700	1,543	6	grey
VIB5-1200	1,200	2,646	6	red
VIB5-1500	1,500	3,307	6	green

DIMENSIONS

Size	Cup Ø D	Hole spacing A	Base length K	Height H	Hole Ø d	Thread G
VIB1	61.5	84	110	35	9	M12
VIB2	79	110	130	30	9	M10
VIB3	108	144	172	38	13.5	M16
VIB4	121	158	186	42	13.5	M16
VIB5	142	182	212	48	13.5	M16

All dimensions in millimetres.

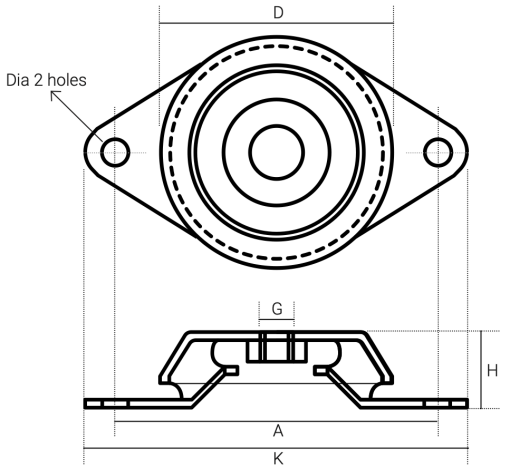

Dimensions in millimetres.

DESCRIPTION

- Mounting equipment on VIB dampers protects it from the shock and vibration found in many environments.
- In mobile applications, the equipment stays stable and isolated from base vibration during transport.

APPLICATION

- Diesel generator sets
- Air compressors (reciprocating and screw)
- Fans and motor units
- Centrifuges
- Air-conditioning units
- Combustion engines

Note: Research and development is an ongoing process. As improvements are made, specifications and dimensions may change without notice. Dimensional tolerances conform to international standards.