DEFLECTION.CA

MICKAEL HAUSMANN
514 371-6669 | mickael@deflection.ca
deflection.ca

CATEGORY: RUBBER-METAL ISOLATORS

VIBS 3-7 SERIES

Compact rubber-metal vibration damper

10–50 kg Static load (22–110 lb)	**3–25 kg** Mobile load (7–55 lb)	**5 models** Same dimensions, M6 thread

DESCRIPTION

- Mounting equipment on VIBS dampers protects it from the shock and vibration found in many environments.
- In mobile applications, the equipment stays stable and isolated from base vibration during transport.


APPLICATION

- Diesel generator sets
- Air compressors (reciprocating and screw)
- Fans and motor units
- Centrifuges
- Air-conditioning units
- Combustion engines

LOAD TABLE

Model	Mobile application (kg)	(lb)	Static application (kg)	(lb)
VIBS-3	3–5 kg	7–11 lb	10 kg	22 lb
VIBS-4	5–10 kg	11–22 lb	20 kg	44 lb
VIBS-5	10–15 kg	22–33 lb	30 kg	66 lb
VIBS-6	15–20 kg	33–44 lb	40 kg	88 lb
VIBS-7	20–25 kg	44–55 lb	50 kg	110 lb

Maximum load per damper.

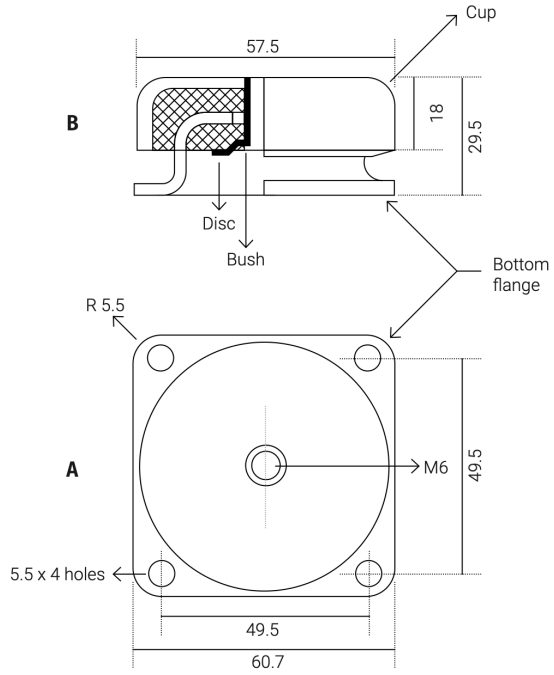

Dimensions in millimetres, identical for all five models. Thread: M6. Mounting holes: 4 x Ø 5.5 mm.

Note: Research and development is an ongoing process. As improvements are made, specifications and dimensions may change without notice. Dimensional tolerances conform to international standards.